




Diaphragm Pumps for Air, Gases and Vapours

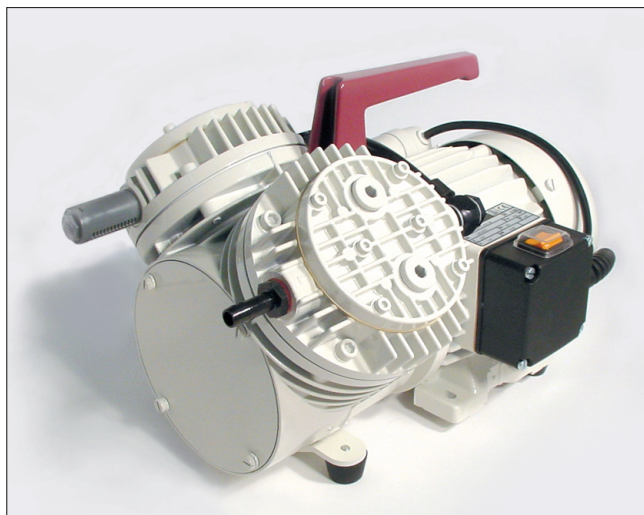

Diaphragm Vacuum Pumps

Technical features:

- 100% oil-free transfer
- Pure transferring and evacuation of gases
- Versions for slightly aggressive or corrosive gases and vapours
- Maintenance-free
- Environmentally friendly
- Gastight, leakage rate approx. 6×10^{-3} mbar x l/s, not tested in serial production.

Series N 035.3 A_.18 Pumps

Series N 035.3 diaphragm pumps are double-head, dry-running devices used in a wide range of laboratory applications. They transfer and pump down without contamination. The pumps are available in various versions differing in the materials which contact the media.

Material in contact with the pumped media

Type/OrderNo.	Pump head	Diaphragm	Valves
N 035.3 AN.18	Aluminium	CR	Stainless steel
N 035.3 AT.18	Aluminium	PTFE-coated	Stainless steel

Choose the pump and the motor in accordance with the following example:
N 035.3 AN.18 with IP 44-Motor.

Technical data:

	N 035.3 AN.18 IP 20-Motor	N 035.3 AN.18 IP 44-Motor
Delivery (l/min) ¹⁾	30	30
Ultimate vacuum (mbar abs.)	13	13
Operating pressure (bar g)	-	-
Connectors for tube (mm)	ID 9	ID 9
Permissible gas and ambient temperature	+5...+40 °C	+5...+40 °C
Voltage/Frequencies	230V/50Hz	230V/50Hz
Motor protection	IP 20	IP 44
Power P ₁	300 W	320 W
Operating current	1.55 A	1.9 A
Weight	11.3 kg	11.6 kg
Dimensions		
LxHxW (mm)	323/222/250	351/222/250
With thermal switch		

Motors with other voltages and frequencies on request.

¹⁾ at atm. pressure

Versions for slightly aggressive gases and vapours

	N 035.3 AT.18 IP 20-Motor	N 035.3 AT.18 IP 44-Motor
Delivery (l/min) ¹⁾	27	27
Ultimate vacuum (mbar abs.)	20	20
Operating pressure (bar g)	-	-
Connectors for tube (mm)	ID 9	ID 9
Permissible gas and ambient temperature	+5...+40 °C	+5...+40 °C
Mains	230V/50Hz	230V/50Hz
Motor protection	IP 20	IP 44
Power P ₁	300 W	320 W
Operating current	1.55 A	1.9 A
Weight	11.3 kg	11.6 kg
Dimensions		
LxHxW (mm)	323/222/250	351/222/250
With thermal switch		

Motors with other voltages and frequencies on request.

¹⁾ at atm. pressure


Accessories

Description	Details	Order No.
Silencer/Filter	G 1/4	000352
Fine control valve with vacuum gauge	suction side	000354




Dimensions and performance characteristics

Pump down time for 20 l receiver

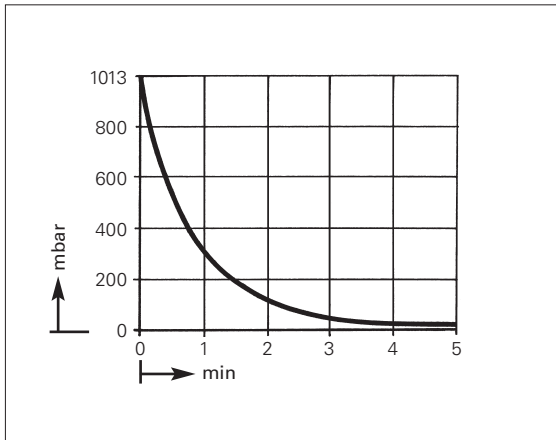

Performance characteristics

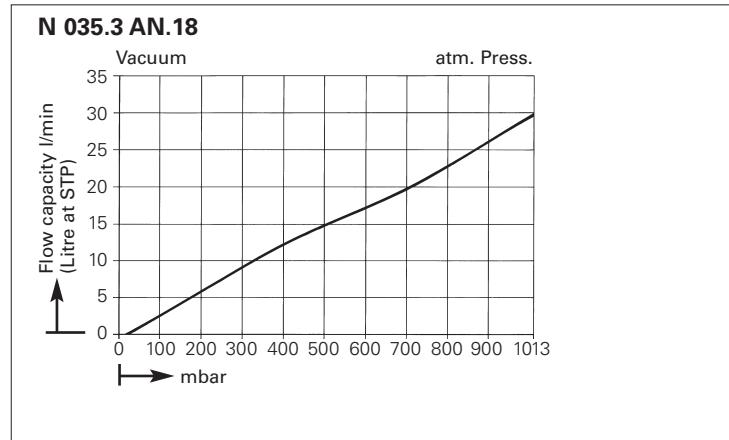

Dimensions (mm)

