



## Diaphragm Pumps for Air, Gases and Vapours



### LABOPORT® Chemically-resistant Diaphragm Vacuum Pump

#### Technical features:

- 100% oil-free transfer
- Pure transferring and evacuation of gases
- Highly compatible with vapours and condensation
- Chemically-resistant
- Therefore suitable for highly aggressive or corrosive gases and vapours
- Maintenance-free
- Environmentally friendly
- Gastight, leakage rate approx.  $6 \times 10^{-3}$  mbar x l/s, not tested in serial production.

#### Serie LABOPORT® N 842.3 FT.18 Pump

The chemically-resistant serie N 842.3 diaphragm pump is a double-head, dry-running device used in a wide range of laboratory applications. These pump transfer and pump down without contamination.

The heart of this very compact pump is a KNF structured diaphragm. This patented diaphragm was stress-optimized using the Finite Elements method. As a result, we were able to make the pump smaller while increasing the service life of the diaphragm.

#### Technical data: **N 842.3 FT.18**

Delivery (l/min) <sup>1)</sup>	34
Ultimate vacuum (mbar abs.)	2
operating pressure (bar g)	1
Connectors for tube (mm)	ID 10
Permissible gas and ambient temperature	+5...+40 °C
Mains	230V/50Hz
Motor protection	IP 44
Power P <sub>1</sub>	245 W
Operating current	1.5 A
Weight	13.4 kg
Dimensions	
LxHxW (mm)	341/223/167
With thermal switch and power fuse	

Motors with other voltages and frequencies on request.

<sup>1)</sup> at atm. pressure

#### Material in contact with the pumped media

Type/OrderNo.	Pump head	Diaphragm	Valves
N 842.3 FT.18	PTFE	PTFE-coated	FFPM

#### Spare parts


Description	Order No.
Spares kit	057359




# Diaphragm Pumps for Air, Gases and Vapours

## Dimensions and performance characteristics

Pump down time for 10 l receiver

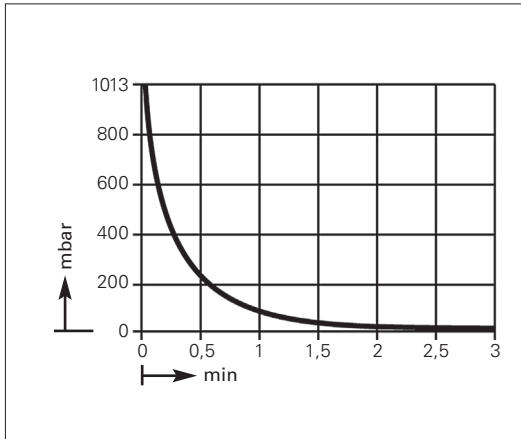

Performance characteristics

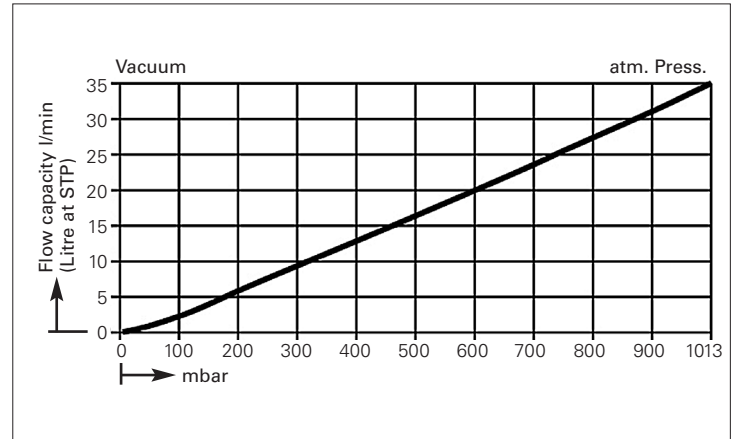

## Dimensions (mm)

