

Laboratory Refrigerator and Upright Freezer LabMed

LM 05..WN

- Static cooling and manual defrost
- Analogue thermostat
- External housing made of white, galvanized steel plate
- Interior made of white ABS plastic
- 4 litres freezer compartment (only LM 0505WN)
- 1 plastic-plated grid insert
- 2 feet for height adjustment at front

LM 6025WN

- Static cooling and manual defrost
- Operating panel with main switch
 - Analogue thermostat and digital display (LED)
 - Visual alarm device
- Lockable door, door hinges on right, changeable
- Door seal changeable
- External housing and interior made of white, galvanized steel plate
- 5 plastic-plated grid inserts, height adjustable
- 4 castors, 2 feet for height adjustment at front



LabMed LM 05..WN



LabMed LM 6025WN

Model LabMed LM	LM 0505WN	LM 0522WN	LM 6025WN
Temperature range °C	-1/+8	-16/-24	-12/-25
Content litres (gross)	50	40	618
Ext. dimensions (WxDxH) mm	475x450x522	475x450x522	670x870x1960
Depth with door opened mm	895	895	1510
Weight kgs	16	18	130
Mains connection volts/Hz/ph	230/50/1	230/50/1	230/50/1
Refrigerant	R600a	R600a	R404A

Alternative units: ProfiFrost and LabStar Phoenix LSPH..24N.

LabMed LM + Accessories:

Cat. No.

LabMed LM 0505WN	GSLM0505WN
LabMed LM 0522WN	GSLM0522WN
LabMed LM 6025WN	GSLM6025WN
Alarm unit visual / audible, electronic control and digital display, with no-volt remote contact (LM 6025WN only).	ZLM2-005+110/-50
No-volt remote alarm contact for connection to a remote alarm system.	ZXX2-070+10/-30
Digital temperature display incl. PTC temperature sensor.	ZXX2-015-001
Measuring range +50/-50°C (LM05.. only).	
ProfiTec Temperature Monitoring and Recording System (see sep. brochure).	GPTEC4A
ProfiCaller telephone dialler (see sep. brochure).	ZXX2-009-TX
Pt-100 temperature sensor, add. installed for ext. temperature recording.	ZXX2-020-2L
MIN/MAX thermometer to be placed in refrigerators or freezers.	ZXX2-019-001
Measuring range -50/+50°C, an add. temperature sensor is not required.	
MIN/MAX digital thermometer. Hand-held unit with digital display as well as data-hold and relative measuring function. Measuring range -200/+1370°C.	ZXX2-019-011
An add. temperature sensor is required, eg. Cat.-No. ZXX2-022-100.	
Temperature sensor for MIN/MAX thermometer ZXX2-019-011.	ZXX2-022-100
Measuring range -100/+1000°C. Length 2 m. Other ranges on request.	

Innovation prize


ProfiTec Intelligent Temperature Monitoring and Recording System



- For up to 4 refrigerators and/or freezers
- Readings are stored over a period up to 781 days
- Warning for excess and insufficient temperature
- Includes No-volt remote alarm contact
- The measuring protocol can be fed to PC via RS 232 port

Inventory Systems

Stainless steel drawers, freezer cassettes and grid inserts enable specimens to be stored and retrieved in a clear and orderly manner. Optimum use is made of the storage capacity.

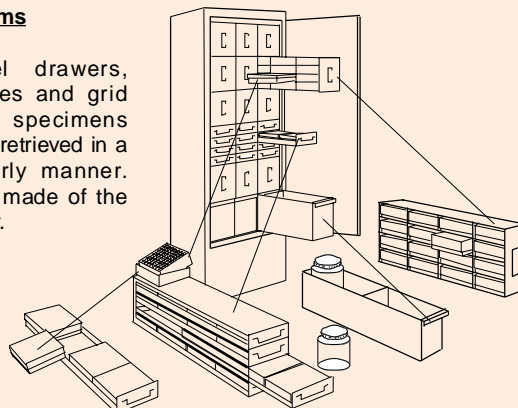

Recommendations for additional storage sets can be found in our separate catalogue.



Please ask for a personal fitting option.

